


COMBIPAC™

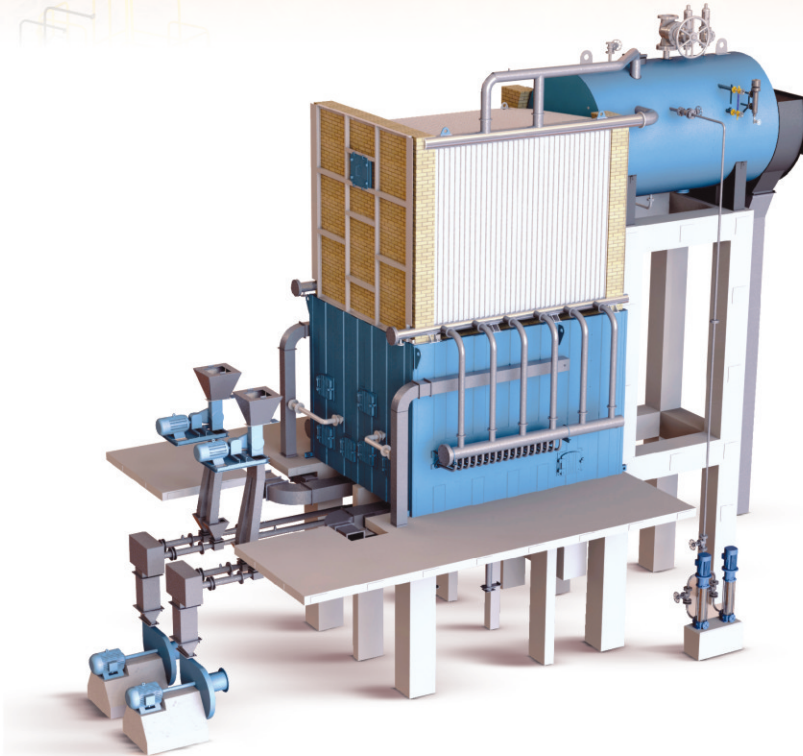

Multi-solid fuel fired, fluidised hybrid boilers

- Capacity: 4000 to 8000 kg/hr
- Standard Design Pressure: 10.54 & 17.5 kg/cm²g (design available up to 32kg/cm²g)
- Fuel: Rice husk, Indian coal, Indonesian coal and lignite (also available with other agro-waste fuels)